

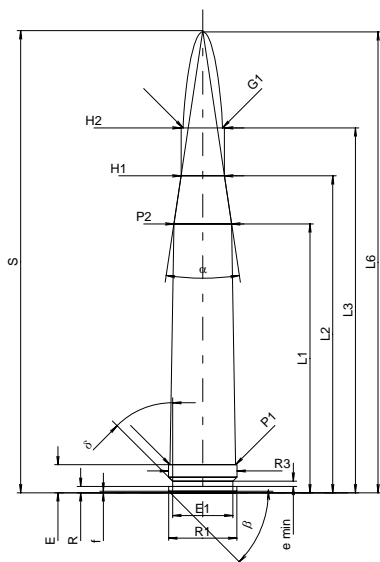
C.I.P.**30 Super Belt Riml. H&H**

TAB. III

Date 84-06 14

Country of Origin: GB

Revision 02-05-15

**CARTRIDGE MAXI****Lengths**

L1 *	=	53.34
L2 *	=	62.87
L3 ¹⁾	=	72.39
L4	=	
L5	=	
L6	=	91.44

Case Head

R	=	1.27
R1	=	13.51
R3	=	13.56
E ¹⁾	=	5.56
E1	=	11.94
e min	=	1.02
δ	=	45°
f	=	0.30
β	=	45°

Powder Chamber

P1	=	13.03
P2 *	=	11.43

Junction Cone

α	=	16°56'59"
S	=	91.69
r1 min	=	
r2	=	

Collar

H1 *	=	8.59
H2 ¹⁾	=	8.59

Projectile

G1 ¹⁾	=	7.82
G2	=	
F	=	
L3+G	=	

Pressures (Energies)**Method Transducer**

Pmax	=	3650 bar
PK	=	4198 bar
PE	=	4563 bar
M	=	25.00
EE	=	4305 Joule

Miscellaneous Dimensions

Fe	=	
delta L	=	

CHAMBER MINI**Lengths**

L1	=	
L2	=	
L3	=	

Breech

R	=	
R1	=	
R2	=	
R3	=	
r	=	

Powder Chamber

E	=	
P1	=	
P2	=	

Junction Cone

α	=	
S	=	
r1 max	=	
r2	=	

Collar

H1	=	
H2	=	

Commencement of Rifling

G1	=	
G	=	
α1	=	
h	=	
s	=	
i	=	
w	=	

Barrel

F ¹⁾ *	=	7.61
Z ¹⁾	=	7.82

Grooves

b	=	2.72
N	=	6
u	=	254.00
Q	=	47.24 mm ²

Scale 1:1.5

Dimensions in << mm >>
Dimensions and Tolerances for Proof Barrels
see Appendix CR 1.

Notes: 1) Check for safety reasons
* Basic dimensions