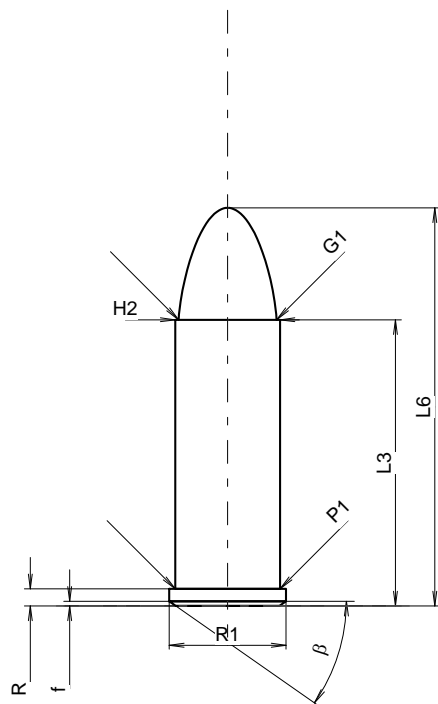
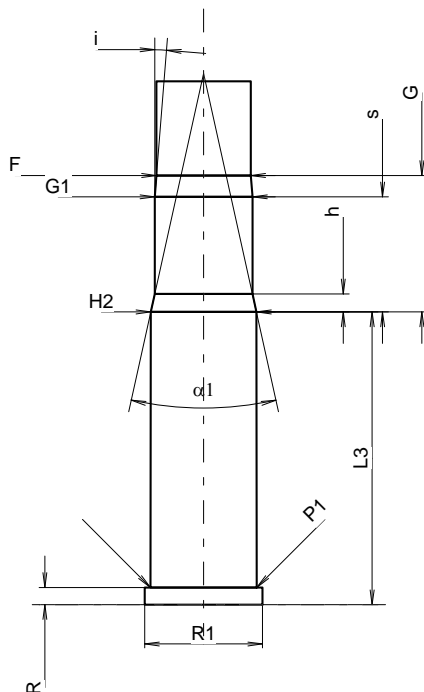


C.I.P.	32 S.& W. Long	TAB.	IV
		Date	84-06-14
		Revision	09-05-05
Alternative Names: 32 Colt New Police			
	<b>CARTRIDGE MAXI</b>	<b>CHAMBER MINI</b>	
	<b>Lengths</b> L1 = L2 = L3 = 23.37 L4 = L5 = L6 = 32.51 <b>Case Head</b> R = 1.40 R1 = 9.53 R3 = E = E1 = e min = δ = f = 0.38 β = 35° <b>Powder Chamber</b> P1 = 8.56 P2 = <b>Junction Cone</b> α = S = r1 min = r2 = <b>Collar</b> H1 = H2 = 8.56 <b>Projectile</b> G1 = 8.00 G2 = F = L3+G = 34.51 <b>Pressures (Energies)</b> <b>Method Transducer</b> Pmax = 1000 bar PK = 1150 bar PE = 1300 bar M = 12.50 <b>Miscellaneous Dimensions</b> Fe 1)4) = 0.25 delta L =	<b>Lengths</b> L1 = L2 = L3 = 23.90 <b>Breech</b> R = 1.40 R1 = 9.63 R2 = R3 = r = <b>Powder Chamber</b> E = P1 = 8.67 P2 = <b>Junction Cone</b> α = S = r1 max = r2 = <b>Collar</b> H1 = H2 = 8.63 <b>Commencement of Rifling</b> G1 = 7.98 G = 11.14 αl = 25° h = 1.47 s = 9.40 i = 4°35' w = <b>Barrel</b> F = 7.70 Z = 7.92 <b>Grooves</b> b = 2.41 N = 5 u = 476.00 Q = 47.91 mm²	
			
Scale 1.62:1			
Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 1.		Notes: 1) Check for safety reasons 4) Headspace on Rim	